
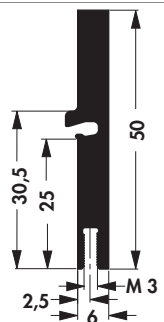
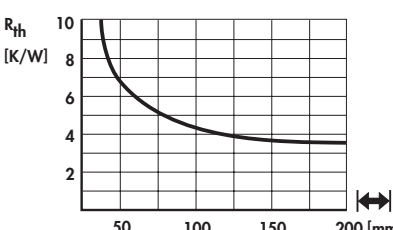


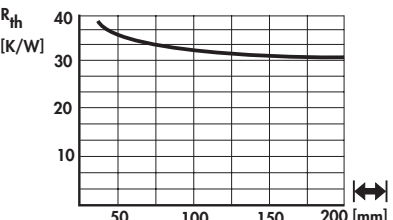


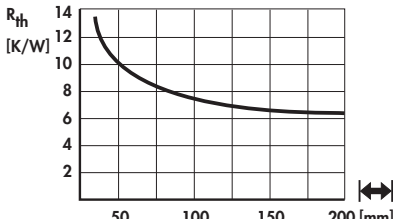

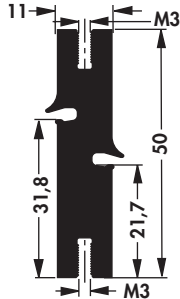
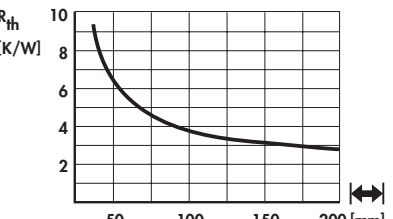


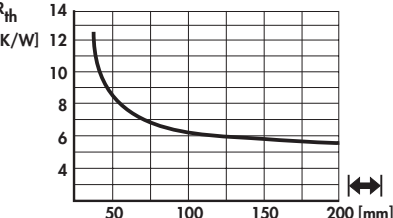


Extruded heatsinks for lock-in retaining spring

A
B
C
D
E
F
G
H
I
K
L
M
N

<p>art. no.</p> <p>SK 575 ...</p>			
<p>please indicate: ... $\left[\begin{array}{c} \text{---} \\ \text{---} \end{array} \right]$ 25 37.5 50 75 84 100 1000 mm</p>			
<p>art. no.</p> <p>SK 512 ...</p>			
<p>please indicate: ... $\left[\begin{array}{c} \text{---} \\ \text{---} \end{array} \right]$ 25 50 100 1000 mm</p>			
<p>art. no.</p> <p>SK 480 ...</p>			
<p>please indicate: ... $\left[\begin{array}{c} \text{---} \\ \text{---} \end{array} \right]$ 25 37.5 50 75 84 100 1000 mm</p>			
<p>art. no.</p> <p>SK 490 ...</p>			
<p>please indicate: ... $\left[\begin{array}{c} \text{---} \\ \text{---} \end{array} \right]$ 37.5 50 75 84 100 1000 mm</p>			
<p>art. no.</p> <p>SK 492 ...</p>			
<p>please indicate: ... $\left[\begin{array}{c} \text{---} \\ \text{---} \end{array} \right]$ 25 37.5 50 75 84 100 1000 mm</p>			

please note: profile threads → A 4

- | | | | |
|----------------------------------|---------------|------------------------------|-----------|
| Mounting parts for heatsinks | → E 47 – 48 | Heatsinks for PCB | → A 89 |
| Insulating caps | → E 49 | Profiles for PCB components | → A 91 |
| Mounting pads | → E 44 | Heatsinks with threaded rail | → A 92 |
| Lock-in transistor fixing spring | → A 117 – 119 | Technical introduction | → A 2 – 7 |