REVISIONS		
ISS	ZONE	DESCRIPTION\PER REQUEST\DATE

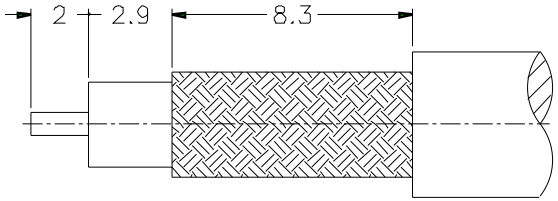

RECOMMENDED
CABLE STRIPPING DIM'S

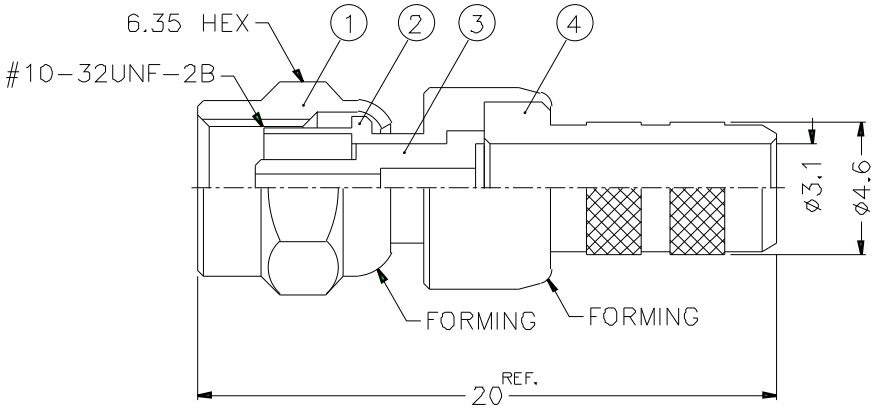



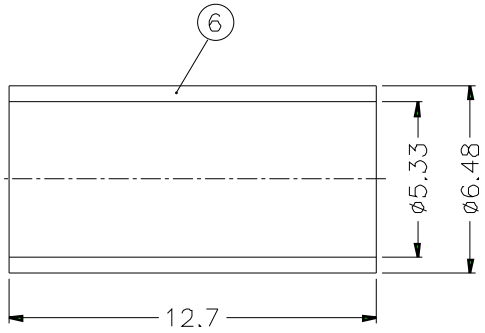

NOTES: FINISH (PLATING THICKNESS IN MICRO-INCHES)
1. OCE
2. GOLD PL. 3 MIN THICK OVER NICKEL PL. 100 MIN. THICK OVER COPPER STRIKE
3. BERYLLIUM COPPER PER QQ-C-530
4. GOLD PL. 30 MIN. THICK OVER NICKEL PL. 100 MIN. THICK OVER COPPER STRIKE
5. TEFLON MIL-P-19468

1. CRIMPED FERRULE
   HEX CRIMP SIZE .213"
2. CONTACT PIN TO SOLDER

NO.	DESCRIPTION	MATERIAL	FINISH	Q'TY	DRAWING NO.
6	FERRULE	COPPER	NOTE 2	1	FR-64B/533X127C
5	CONTACT PIN	NOTE 3	NOTE 4	1	SMB6121A2-6-125 /1
4	BARREL	NOTE 1	NOTE 2	1	SMB6121A2-3-46 /31
3	INSULATOR	NOTE 5	NATURAL	1	SMC6121A2-3T-50
2	BODY	NOTE 1	NOTE 2	1	SMC6121A2-2
1	SHELL	NOTE 1	NOTE 2	1	SMC6121A1-1

DIMENSIONS ARE IN MILLIMETERS

UNLESS OTHERWISE SPECIFIED TOLERANCES
0.5-6 = ±0.2
6-30 = ±0.4
30-120 = ±0.6
120-315 = ±1
315-1000 = ±1.6
1000-2000 = ±2.4

SCALE 4/1 ISSUE A

PART NO. SMC6121A2-3GT30G-1-50

APPROVED DATE 10-11-01'

CHECKED DATE 10-11-01'

DRAWN DATE 10-11-01'

FILE NO

Amphenol

TITLE
SMC CRIMP PLUG

DRAWING NO.
KJ-SMC6121A2-3GT30G-58U-50

ITEM NO.