
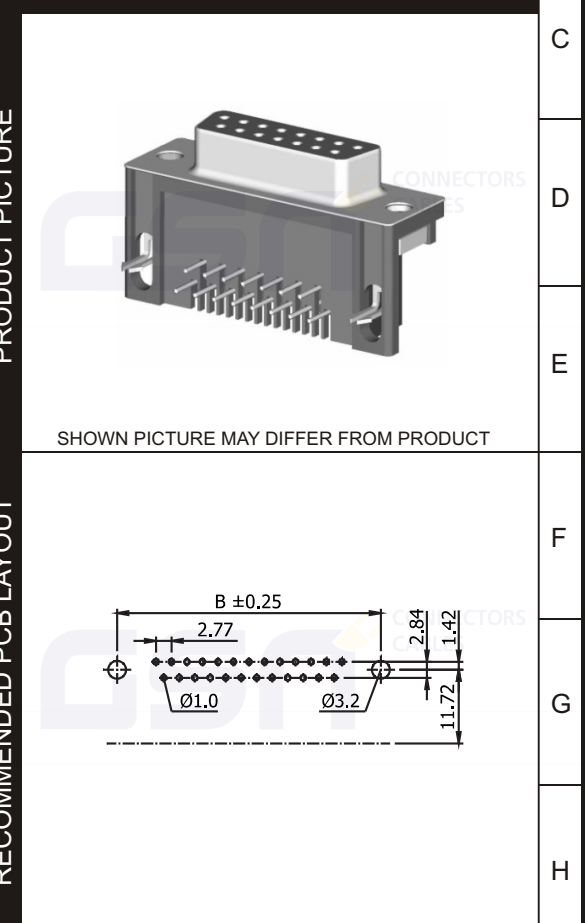


	1	2	3	4	5	6	7	8
A TECHNICAL DATA	01	CONTACT MATERIAL	BRASS		13	DIMENSIONS FOR POLE NO. 25	A=38.38, B=47.04, C=53.04	
	02	INSULATOR MATERIAL	PBT		14	DIMENSIONS FOR POLE NO. 37	A=54.83, B=63.50, C=69.32	
	03	FLAMMABILITY	UL 94V-0		15	MOUNTING PART FOR PCB	E: 2-PRONG BOARDLOCK W/ THREAD RIVET UNC 4#40	
	04	SHELL	STEEL, NICKEL PLATED		16	MOUNTING PART FOR COUNTERPART	C: SHORT SCREW 4.8MM ASSEMBLED	
	05	VOLTAGE RATING	250V AC/DC		17	PLATING	FULL FLASH GOLD	
	06	CURRENT RATING	3.0A AC/DC		18	PACKING	TRAY	
	07	INSULATION RESISTANCE	5000 MEG OHM MIN		19	POLE AMOUNT	09	
	08	CONTACT RESISTANCE	30 MILLI OHM MAX		20	WEBCODE	1491	
	09	OPERATING TEMPERATURE	-40°C TO +85°C		21			
	10	SUGGESTED SOLDERING CURVE	PLEASE CONTACT US		22			
	11	DIMENSIONS FOR POLE NO. 9	A=16.33, B=24.99, C=30.81		23			
	12	DIMENSIONS FOR POLE NO. 15	A=24.66, B=33.32, C=39.14		24			

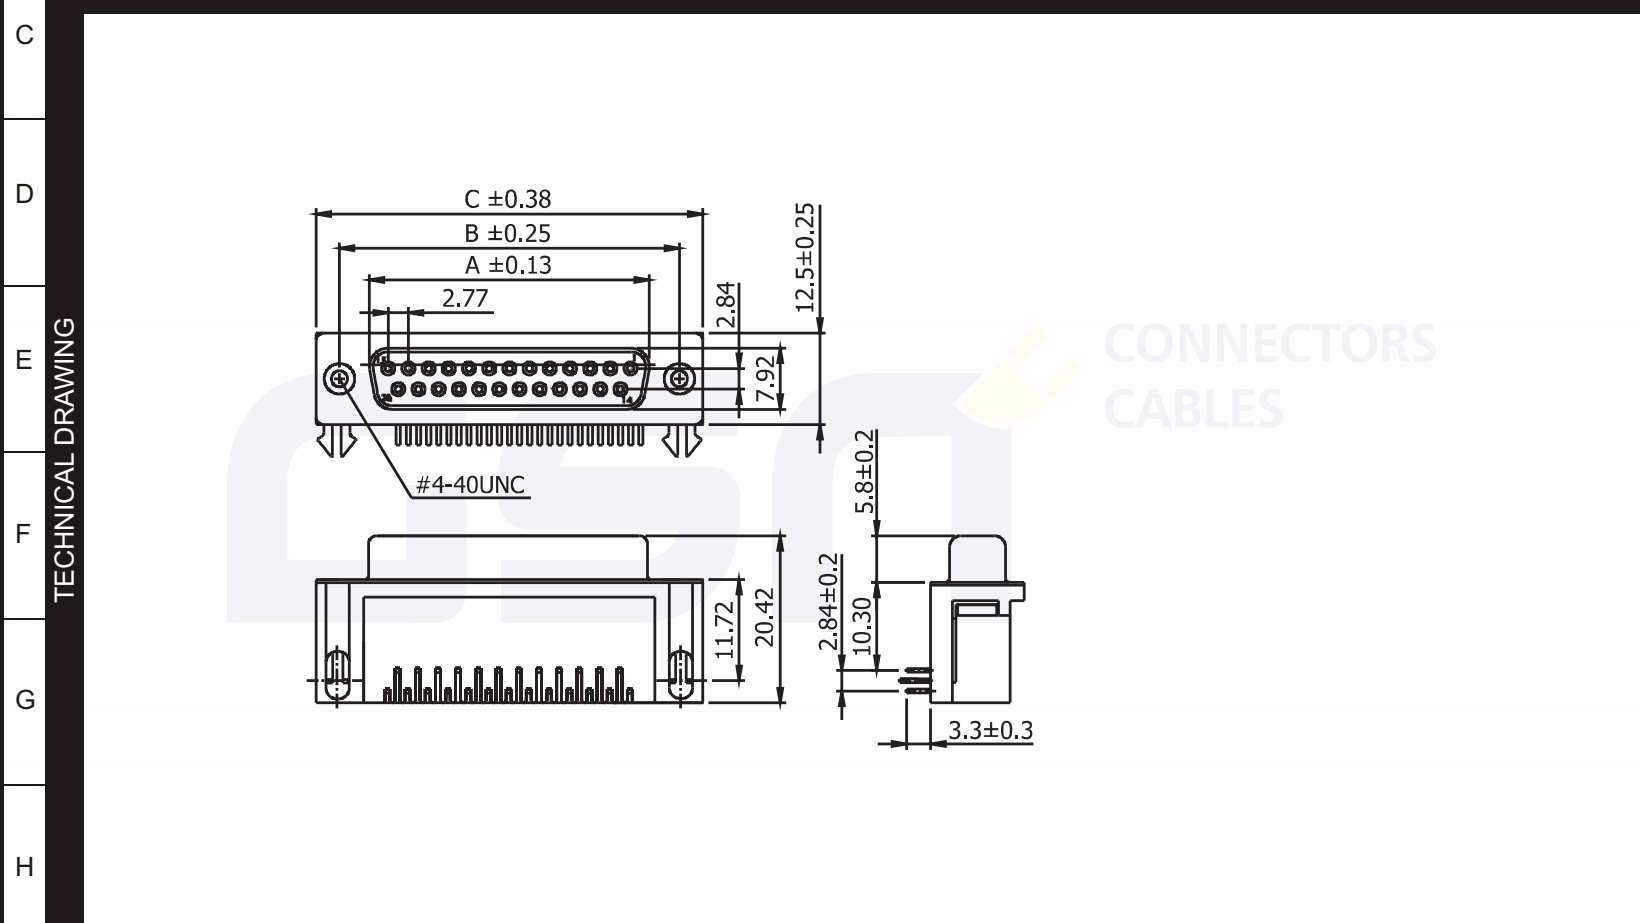

1	2	3	4	5	6	7	8	
		REVISION:	TOPIC:	DATE:	NAME:	UNIT:	PART. NO.:	DESCRIPTION:
01	FIRST RELEASE	23. Oct 2006	芮天娜	MM	50-HEN-F09EC-00	D-SUB, THT HORIZONTAL, 90°, 09 POLES, FEMALE		
02	CD CHANGE	20. Mar 2009	芮天娜	TOLERANCES (UNLESS OTHERWISE SPECIFIED):				
03	ADD DIM 11.72 + 20.42	11. Feb 2010	芮天娜	x=±0.30MM x.x=±0.25MM x.xx=±0.15MM				
04	STEEL PLATING CHANGE TIN TO NICKEL	22. Apr 2010	芮天娜	NO. OF PAGES:	COMPLIANT WITH:			
05				1/1	ROHS			
						GSN ELECTRONICS PTE. LTD © HTTP://WWW.GSN.CN.COM		