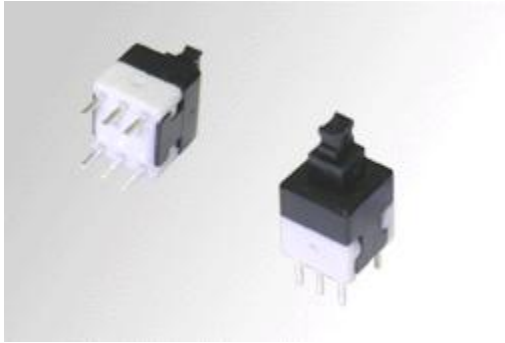




BS580 BS701 BS800 BS850 - SERIES

5.8x5.8, 7x7, 8x8, 8.5x8.5 Push Switch up to DC 30V 0.3A, Lock or Momentary


SCHEMATICFREEPUSH

- DC30V 0.1A (BS580,BS701,BS800)
- DC30V 0.3A, DC16V 0.5A (BS850)
- Contact resistance : 50m ohm .
- Insulation resistance : 100M ohm min.
- Withstand voltage : AC125V 1 minute. (BS580,BS701)
- Withstand voltage : AC250V 1 minute. (BS800,BS850)
- Soldering temper : 245 ± 5°C 3 Sec
- Mechanical life : 100,000 cycles
- Life cycle : 10,000 cycles
- Operating temper. Range : -25°C + 65°C
- Ambient humidity range : Less than 85%RH
- Operation : 160±80 gf.

How to order

BS	-	800	-	N
		Housing Dim.		N
		580	5.8x5.8mm	Momentary
		701	7.0x7.0mm	Lock
		800	8.0x8.0mm	
		850	8.5x8.5mm	

BS-800-N

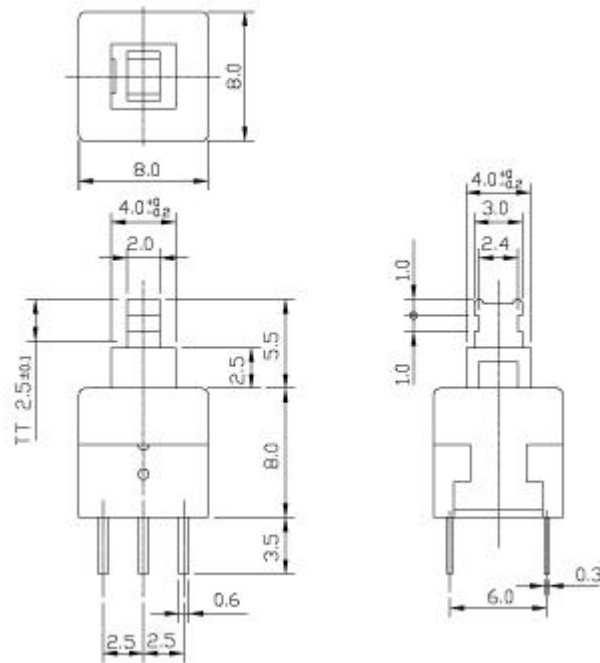

BS-580-L

