

TMM

TMM Series  
1.27mm pitch



X	-X	-XX	-X
---	----	-----	----

Type

- 1=IDC Male
- 2=IDC Transition Plug
- 3=DIP Male Straight
- 4=DIP Female Straight
- 5=DIP Female R/A
- 6=SMT Female Straight

Locking

- L= with Lock
- 0= w/o Lock


No. of Positions

- 04= 04 Positions
- :
- :
- 26= 26Positions




Packaging

- 1= Tape&Reel+cap
- 2= Tube
- 3= Bag
- 4= Tape&Reel w/o cap

TMM-2  
(IDC Plug)

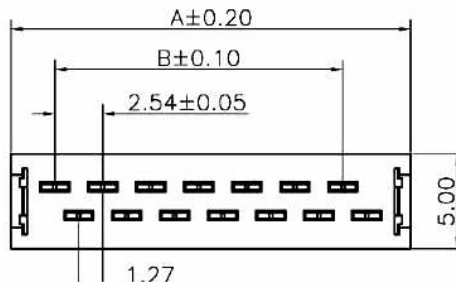

Circuits	Dimension	
	A	B
4	8.45	2.54
6	10.99	5.08
8	13.53	7.62
10	16.07	10.16
12	18.61	12.70
14	21.15	15.24
16	23.69	17.78
18	26.23	20.32
20	28.77	22.86
22	31.31	25.40
24	33.85	27.94
26	36.39	30.48

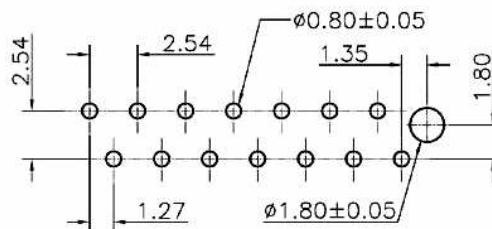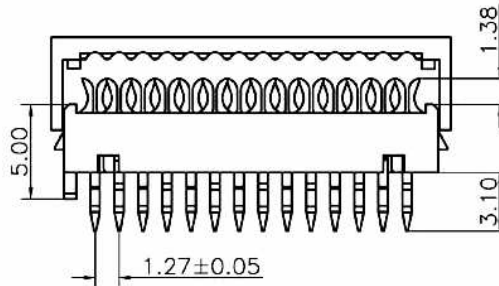

PCB Layout

General Specification

Materials and Finish :

**Insulator:** Themoplastic, UL 94V-0, Color in Red  
**Contact :** Phosphor Bronze, Tin plated.

Electrical :

**Contact Resistance:** 20 mΩ max. at 1A DC  
**Insulation Resistance:** 1000 MΩ min, at 500 V/DC.  
**Dielectric Withstanding Voltage :** 500 V AC/RMS 60Hz for one minute.  
**Current Rating :** 1.5 A max,  
**Voltage Rating :** 230V AC/RMS 60Hz, DC

Environment :

**Operating Temperature:** -40 degree C to +105 degree C