



Features & Benefits


- Long-term operating performance
- Suitable for Power supplies for products such as that demand long-term reliability

Specifications


| | | |
|--------------------------|----------------|---------------|
| Part number | | BR-2/3A |
| Nominal voltage | | 3V |
| Nominal capacity | | 1,200mAh |
| Continuous drain | | 2.5mA |
| Dimensions* ¹ | Diameter(Max.) | 17.0mm |
| | Height(Max.) | 33.5mm |
| Weight* ¹ | | Approx. 13.0g |
| Operating temperature | | -40°C ~ +85°C |

*¹ Without tabs.


Dimensions

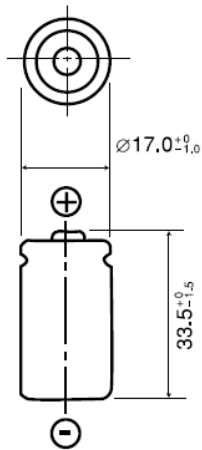

Discharge temperature characteristics

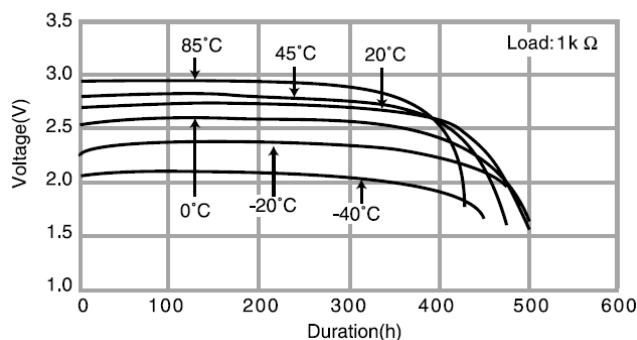

Operating voltage vs. Discharge current (voltage at 50% discharge depth)

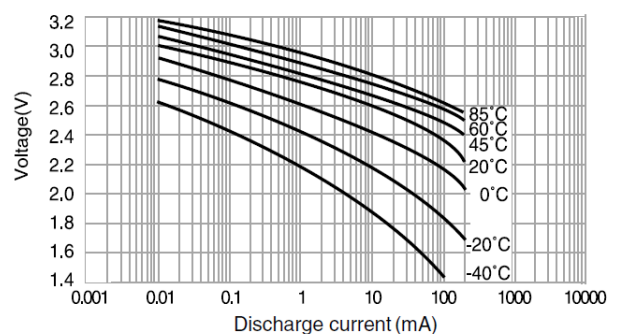

Applications

Commercial equipment (communication/measurement devices), meters (gas, water, electricity, hot water), memory backup (large FA equipment), automotive electronic components (security alarms), etc.

This data in this document is for descriptive purposes only and is not intended to make or imply any guarantee or warranty. As of March, 2021. The contents of this product information are subject to change without notice.

Please visit our website at:
Panasonic Corporation

<https://eu.industrial.panasonic.com/products/batteries-energy-products/primary-batteries/lithium-batteries>

